


H8069 (176°C / 349°F Nominal)

LINEAR HEAT DETECTION CABLE (LHDC)

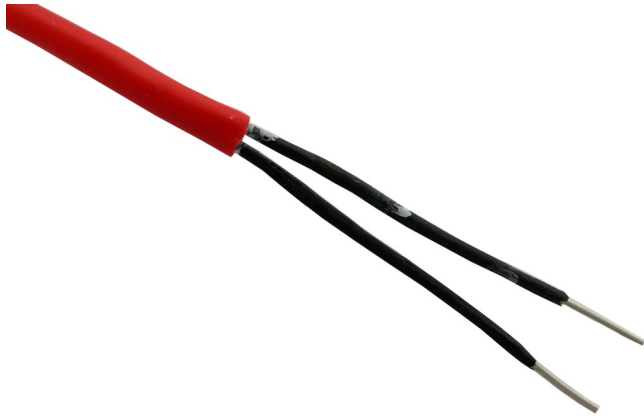

General

The simple and proven technology of digital Linear Heat Detection Cable (LHDC), makes it a product of choice for difficult and challenging applications where other technologies struggle to work.

With its ease of installation and low maintenance it also provides a cost effective solution where project expenditure requires to be kept at a minimum.

The sensing cable is formed from a pair of twisted steel conductors each with temperature sensitive insulation and then an overall PVC outer sleeve. When the temperature sensitive insulation reaches its predetermined alarm temperature the two conductors short together providing the digital or switched signal.

The cable can be connected to any unit capable of monitoring a switched signal, i.e. Conventional fire panel, addressable switch monitor unit or PLC.

The PVC outer sleeve of the H8069 offers good UV resistance allowing it to be deployed in external applications.

Features

Simple digital switch operation

Continuous sensing along the total length of the element.

Fixed alarm temperature. Unaffected by changes in ambient temperature.

Compatible with switch monitoring units and conventional alarm panels.

Suitable for use in Hazardous areas using safety barriers.

UV resistant PVC outer sleeve.

Rugged and durable construction.

Simple maintenance free installation.

Small diameter and bend radius.

FM Approved,

Applications

Conveyors / bearing protection

Escalators, moving walkways.

Cable tunnel / tray protection

Road and rail tunnels

Road and rail motor compartments

Electrical switch gear & transformers

Refrigerated rooms and cold stores.

Floating roof tank rim protection.

Motor and pump overheat detection.

Dirty and dusty environments.

H8069 (176°C / 349°F Nominal)

LINEAR HEAT DETECTION CABLE (LHDC)

Specifications.

Alarm temperature :	176°C
Max amb temperature :	105°C
Min operating temperature :	-40°C
Min installation temperature :	0°C

Mechanical

Outside Diameter :	4.35mm
Colour :	Red
Number of cores :	2
Core diameters :	0.9mm
Core colours:	Black and Black/White
Minimum bend radius :	50mm (Cold store 100mm)
Weight :	21.0kg/km on the reel (weight of reel typically 2kg)

Electrical

Resistance :	100 Ohms/km @ 20°C
Capacitance :	45pF to 130pF
Inductance :	0.74µH to 1.3µH
Voltage rating :	110Vdc 1Amp

Time to detect small flame : 20 sec (Flame touching)

Ordering Information

Part Number

700-180LS

Description

H8069 sensing cable 176°C alarm temperature
Red PVC outer sleeve (ordered by the metre)

Optional

700-451

LDM-519-DDL Digital Distance Location 2km

700-471

LDM-519-DDLX Digital Distance Location 10km

700-441

LDM-519-DIM Digital Interface Module